
## Declaration of performance

## for the product MULTIPROTEC ECO

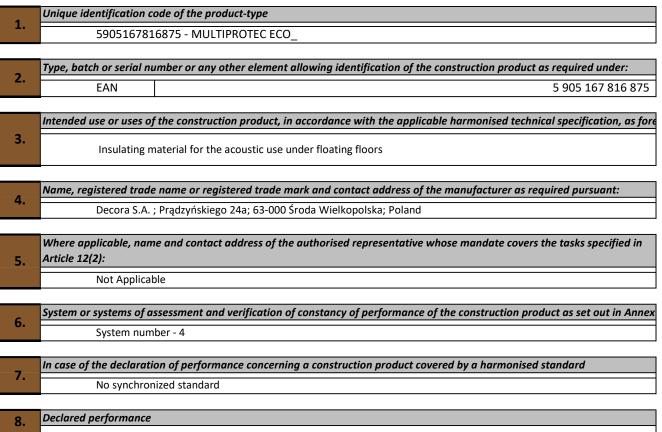

8.					
Symbol	Parameter	Value		Unit	Norm
Т	Thickness	1,5	+/-0,15	[mm]	EN 823:2013
L	Length	8000	-0% + 5%	[mm]	EN 822:2013
W	Width	1000	-1% +2,5%	[mm]	EN 822:2013
Q	Squareness	≤ 4	0	[mm/m]	EN 824:2013
S	Flatness	≤1	0	[mm/m]	EN 825:2013
AW	Surface mass	1,5	+/-10%	[kg/m <sup>2</sup> ]	EN ISO 23997:2012
QW	Density	[-]	[-]	[kg/m <sup>3</sup> ]	EN 1602
RWS	Reflected walking sound	20	+/-2	[%]	CEN/TS 16354:2013, EPLF 021029-3
IS	Impact sound improvement	14	+/-2	[dB]	EN ISO 10140:2007
CS	Compressive strength at 0.5 mm compression	280	+/- 10%	[kPa]	EN 826:2013
CC	Static compressive strength	50	+/- 10%	[kPa]	EN 1606:2013
DL	Dynamic compressive strength	> 2 500 000		[cycles]	EN 13793:2014
PC	punctual conformability	1,2	+/- 10%	[mm]	EN ISO 868:2005
TR	Thermal Resitance	0,005	+/- 0,003	[m <sup>2</sup> K/W]	EN 12664:2002
SD	sD-value	>75		[m]	EN 12086:2013
RLB	Resistance to Large Ball	≤ 1000		[mm]	EN 438-2:2016
RTF	Reaction on fire	Bfl-s1		[-]	EN 13501-1:2010

9.

The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8.

This declaration of performance is issued under the sole responsibility of the manufacturer

creation date	2021-12-02
modification date	2021-12-02
Printed	10.01.2022 13:50

almost Me

k Decora