


Lindau LV

Proces Produkcji	Needlefelt	ISO 2424
Aspekt powierzchni	Flat	ISO 2424
Rodzaj spodu	LV	ISO 2424
Kompozycja runa	100% PP	
Waga runa	630 g/m ²	
Waga całkowita	790 g/m ²	+/- 15% ISO 8543
Wysokość całkowita	4,5 mm	+15% / -10% ISO 1765
Klasa użytkowa	Commercial 33, Areas with heavy use	EN 1307
Klasa komfortu	LC1	EN 1307
Krzesła na rolkach	Yes, permanent use	EN 985
Użytkowanie na schodach	Yes, incidental use	EN 1307
Odporność na światło	≥ 5	ISO 105-B02
Oporność na tarcie, mokre i suche	≥ 4	ISO 105-X12
Trwałość kolorów na wodę	≥ 4	ISO 105-E01
Stabilizacja wymiaru	Shrinkage ≤ 1,2 %	ISO 2551
	Extension ≤ 0,5 %	ISO 2551
Ładowanie elektrostatyczne	< 2kV	ISO 6356
Odporność termiczna	0,07 m ² .K/W	ISO 8302
Odporność na poślizg	> 0,3 Machine direction	EN 13893
	> 0,3 Crossdirection	EN 13893
Palność	Cfl,s1	EN 13501-1
Prodis-ID (GuT)	E1146BAA	www.pro-dis.info
AbZ Nr.	Z-156.601-703	
TÜV PROFICERT product	Certificate number: 70 710 5617-3	

Floorsymbols



Certificates

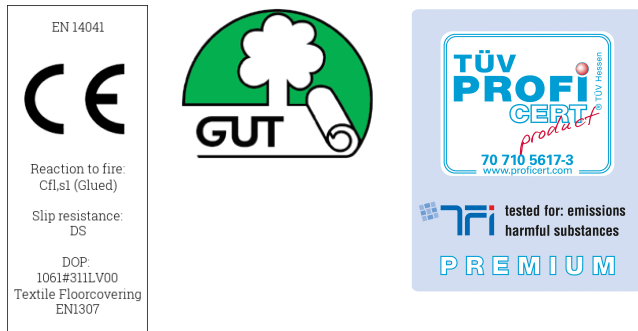

2018-04-30

Vebe Floorcoverings b.v. products are to be installed in full accordance with Vebe installation instructions and recognised trade standards. An effective, regular cleaning and maintenance programme is vital for retaining a high appearance level. Vebe products should only be used as floorcoverings. Note: Vebe Floorcoverings b.v. reserves the right to adapt this specification without giving prior notice. For the latest versions of the technical specifications, check our internet site.

In the area of office chairs we recommend to use mats made of polycarbonate. This extends the life of your carpet.

Laying: Fully glued with adhesive that withstands chair castors.

The producer reserves the right to change technical specifications. Due to variations in raw materials and production circumstances, the product may vary from batch to batch.