


Kolory	Coloris	Farben	Colours
6 colours			
8312 L. Beige			
8315 D. Beige			
8318 Cognac			
8319 Tobacco			
8322 Silver			
8327 Anthracite			

CONAN

Metoda produkcji 5/32" pętelka tuftowana	Méthode de fabrication Tuftée 5/32" bouclé	Herstellungsverfahren Getufted 5/32" Schlinge	Manufacturing process Tufting 5/32" loop-pile
Materiał 100% polipropylen	Composition du velours 100% polypropylene	Polmaterial 100% polypropylene	Pile content 100% polypropylene
Materiał bazowy Tkany polipropylen	Support Tissé PP	Trägermaterial PP Gewebe	Primary backing Woven PP
Podkład Filc	Dossier A.B. + Feutre	Rückenausrüstung A.B. + Vlies	Secondary backing A.B. + Felt
Waga runa ok. 350 gr/m2.	Poids du velours ca. 350 gr/m2.	Polgewicht ca. 350 gr/m2.	Pile weight ca. 350 gr/m2.
Waga użytkowa runa ca. 290 gr/m2	Poids de surface ca. 290 gr/m2	Polschicht gewicht ca. 290 gr/m2	Surface pile weight ca. 290 gr/m2
Waga całkowita ok. 1385 gr/m2.	Poids total Feutre : ca. 1385 gr/m2.	Gesamtgewicht Vlies : ca. 1385 gr/m2.	Total weight Felt : ca. 1385 gr/m2.
Wysokość runa ca. 4,0 mm.	Hauteur du poil ca. 4,0 mm.	Polhöhe ca. 4,0 mm.	Pile height ca. 4,0 mm.
Wysokość całkowita ok. 6,5 mm.	Hauteur total Feutre : ca. 6,5 mm.	Gesamthöhe Vlies : ca. 6,5 mm.	Total height Felt : ca. 6,5 mm.
Gęstość tkania ok. 91.000/m2.	Nombre de points ok. 91.000/m2.	Noppenzahl ok. 91.000/m2.	Number of knots ok. 91.000/m2.
Dostępne szerokości 400 cm	Largeur 400 cm	Breite 400 cm	Width 400 cm
Odporność na światło ISO 105 B02: 5 tot 8	Résistance à la lumière ISO 105 B02: 5 à 8	Lichtechtheit ISO 105 B02: 5 bis 8	Light fastness ISO 105 B02: 5 to 8
Odporność na wodę EN 1307, annex F: 5	Résistance à l'eau EN 1307, annex F: 5	Wasserechtheit EN 1307, annex F: 5	Water resistance EN 1307, annex F: 5
Atest trudnopalności Efl (EN13501-1)	Classement feu Feute : Efl (EN13501-1)	Brandverhaltensklasse Vlies : Efl (EN13501-1)	Fire Class Felt : Efl (EN13501-1)
Odporność termiczna 0,120 m2 K/W	Résistance thermique 0,120 m2 K/W	Wärmedurchlasswiderstand 0,120 m2 K/W	Thermal resistance 0,120 m2 K/W
Izolacja akustyczna 10,0 dB	Isolation aux bruits d'impact 10,0 dB	Trittschalldämmung 10,0 dB	Sound isolation 10,0 dB
Klasa użytkowa klasa 22	Caractéristiques	Besonderheiten	Characteristics

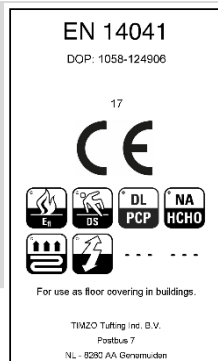

Timzo tufting Industry BV
8280 AA Genemuiden - Holland - Postbus 7 (Post)
Tel. 0031 (0)383854477 Fax 0031 (0)383856571

8281 JD Genemuiden - Holland - Nijverheidstraat 27 (Office)
Email: carpets@timzo.nl Online: www.Timzo.nl